

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number  
**WO 01/06714 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 12/56**,  
12/64

(21) International Application Number: PCT/EP00/06526

(22) International Filing Date: 10 July 2000 (10.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
99113820.7 15 July 1999 (15.07.1999) EP

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON** (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors: **MEGGERS, Jens**; Hüscheiderweg 96, 53639 Königswinter (DE). **FASBENDER, Andreas**; # 10-01 Pinewood, GDNS, 25 Balmoral Park, Singapore 259854 (SG).

(74) Agent: **TONSCHEIDT, Andreas**; Ericsson Eurolab Deutschland GmbH, Ericsson Allee 1, 52134 Herzogenrath (DE).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SCHEDULING AND ADMISSION CONTROL OF PACKET DATA TRAFFIC

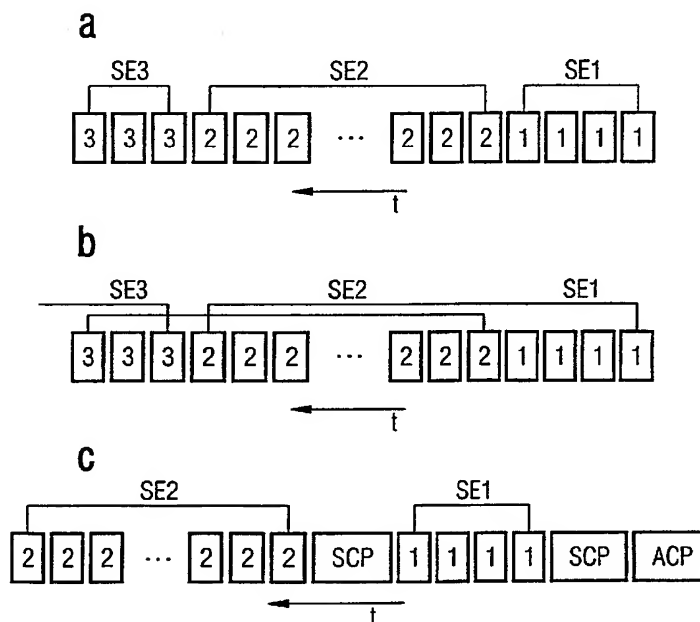

(57) Abstract: A method, apparatus and software program is provided for scheduling and admission controlling of real-time data packet traffic. Data packets are admitted or rejected for real-time processing according to throughput capabilities of a packet scheduler. A delivery deadline is determined for each payload data packet at the packet scheduler and packets are sorted into a time-stamp-based queue. Deadline violations are monitored, and an adaptation of payload data packets can be triggered on demand in order to enter a stable state.

WO 01/06714 A1

## **Scheduling and Admission Control of Packet Data Traffic**

### **5 Field of the Invention**

The present invention relates in general to the processing of packet data traffic in a communications system, and in particular to scheduling of data packets and admission control.

### **10 Background of the invention**

From the prior-art, there are two concepts known for the provision of quality of service in a packet oriented communications network.

One concept is the so-called Integrated Service Concept that is based on the reservation of resources for dedicated data packet streams. For the reservation of resources peer-to-peer signalling of requirements is needed before a transmission of payload data. All network nodes along a transmission path are requested to reserve corresponding resources. The Integrated Service Concept is described in: D. Clark et al., Supporting Real-time Applications in an Integrated Services Packet Network: Architecture and Mechanisms, Proceedings SIGCOMM 92, August 1992.

A known signalling protocol is the so-called Resource Reservation Protocol RSVP, that is described in: L. Zhang et al., RSVP: A New Resource Reservation Protocol, IEEE Network Magazine, Sept. 1993. RSVP is a receiver-oriented simplex protocol that reserves resources in one direction along a communications path. The receiver of the data flow is responsible for the initiation of the resource reservation.

The so-called TENET scheme is similar to the Integrated Service Concept (see D. Ferrari et al., A Scheme for Real-Time Channel Establishment in Wide Area Networks, IEEE Journal on Selected Areas of Communications, Vol. 8, pp. 368-379, 1990). It provides guaranteed delays for real-time services in a

5 packet-switching wide-area network and allows bandwidth allocation per packet flow. In this scheme, clients declare their traffic characteristics and performance requirements at the time of communications channel establishment. After a channel is established, data packets are scheduled based on deadlines in the hosts and in the network nodes. In order to do so, a scheduler maintains at least three queues: one for

10 deterministic packets, one for statistical packets, and the third for all other type of packets and all local tasks.

Another concept for the provision of quality of service is the so-called Differentiated Service Concept, which aims to simplify the classification and

15 scheduling of packets with quality of service requirements by the use of priority bits in a protocol header. All packets belonging to a specific quality of service class will be marked with a corresponding priority bit combination in the Internet Protocol header. The packet flows are marked with the priority bits and policed according to a Service Level Agreement at the edge of the network. In the interior of the

20 network, the packets are scheduled based on the priority bits. For the Differentiated Service Concept reference is given to S. Blake et al., An Architecture for Differentiated Services, IETF RFC 2475, December 1998.

Admission control of data packet streams and scheduling of the transmission order

25 of data packets in order to minimise deadline violations of real-time or near real-time multimedia applications are important tasks in communication networks containing bottlenecks. In the following, the term 'real-time' should be understood also as 'near real-time' or, in general, as 'time-critical'. In heterogeneous networks,

bottlenecks appear at network boundaries where traffic from one network is passed to another.

Certain real-time deadlines are usually not passed if only one data packet is delayed.

- 5 Instead, usually a set of data packets spans up a synchronisation entity that has to arrive at the destination, e.g. to display a part of a multimedia output in time.

- Application and intermediate nodes become more and more intelligent and allow for multimedia adaptation. This means that the amount of data bandwidth needed for
- 10 the transmission of a certain multimedia object or presentation is not fixed. The adaptation process can be done by several means like dropping packets of lower priority, hierarchical multimedia coding, adaptive application, bandwidth adaptation gateways or even active networks that deploy processing elements within network nodes. Thus, in case of congestion, the bandwidth can vary in between a certain
- 15 interval. The applications or the network itself may fulfil the needed adaptation task to vary the actual transmission rate in order to prevent deadline violations.

- The existing admission control and scheduling schemes allow only for low bandwidth utilisation by means of peak rate allocations and delay guarantees that
- 20 are given for bursty packet sources. Improved schemes are reaching a higher bandwidth utilisation by applying measurement algorithms that predict the actual available bandwidth by measuring the past bandwidth usage. However, measurement based algorithms provide only weak guarantees and only work efficient with a high amount of statistical multiplexing. Especially wireless
- 25 networks are usually restricted in bandwidth capacity and thus, measurement based and deterministic admission control schemes have poor performances. One reason is that the existing schemes for packet scheduling are treating each packet in the same way. They are not able to detect past deadlines that are relevant for the receiving

applications and thus, they cannot trigger processes that turn the current system into an error-free state.

Traditional schemes classify each packet stream into a priority class. In the Integrated Service Concept this priority class belongs to an average delay that packets of a particular stream will experience. In the Differentiated Service approach, this priority class belongs to a traffic type that should have less delay than other ones. The priority class is usually bounded to an average delay, the packet is expected to experience when admitted to that priority class. When considering multimedia streams with variable bit rates (like video streams), the packets of a single stream will not have the same delay requirements over the time. Instead, a scheduling by determination of a delivery deadline for each individual packet as proposed by the present invention provides a better performance than a priority based scheduling.

Therefore, it is an object of the present invention to provide an improved approach to packet oriented communications systems that overcomes these and other problems, in particular to allow a deadline-oriented scheduling of data packets carrying real-time data traffic.

This object is reached by the method, the system and the software program having the steps and features according to claim 1, 15 and 21.

The solution described in the invention is advantageous because of assignments of individual delivery deadlines to payload data packets that are subject to real-time processing. This is especially useful for data packets of a single multimedia stream with variable bit rates, due to different delay requirements that the packets have over the time. The calculation of a delivery deadline for each individual payload data packet allows an optimal scheduling of the payload data packet via a time-stamp

based queue. Advantageously, synchronisation control parameters necessary for determination of deadlines are read from a synchronisation control packet SCP that is embedded in an incoming data packet stream. This guarantees an easy processing of control parameters and avoids additional signalling and complex protocol

5 structures.

In a preferred use, apart from synchronisation control parameters, parameters like a packet error rate  $P_j$  and a bit rate  $R_j$  of a transmission channel for data packets are incorporated in the deadline calculation. In this way, the current system characteristics can be easily taken into account, which results in an improved

10 performance.

Further preferred embodiments are achieved according to the claims 2 to 14, 16 to 20 and 22 to 30.

15 According to claim 4 it is further advantageous to perform an admission control before delivery deadlines are calculated for payload data packets at a packet scheduler. The decision to admit a real-time processing of a sub-stream of data packets depends on a minimum throughput requirement given by admission control parameters, which can be easily read from an admission control packet ACP.

20 Advantageously, delivery deadline violations for data packets due to throughput lacks can be avoided, because data packets requiring a higher throughput than available are not admitted for real-time processing. Also, unnecessary calculations of delivery deadlines are avoided.

25 According to claim 5 it is advantageous that the admission control takes into account a maximum throughput parameter  $R_h$ . This allows the choice of a more cost-effective throughput than the minimum required throughput  $R_l$  for a sub-stream, up to the maximum throughput  $R_h$  and in dependence of the available throughput.

30

Furthermore, an upper throughput limit  $R_h$  can avoid buffer overflows in the communications system or at the receiver of the data packet stream, because it is guaranteed that data packets are not transmitted too fast.

- 5 According to claim 6 it is advantageous to reject a sub-stream of data packets , which is not admitted for real-time processing, and to send it to the packet scheduler, because this allows still a best effort processing. A dropping of data packets and a corresponding loss of information can therefore be avoided.
- 10 According to claim 7 data packets that are rejected for real-time processing are sorted at the packet scheduler into a second queue FIFO in their order of appearance. This allows a best-effort processing according to a first in - first out strategy for data packets of the second queue FIFO.
- 15 According to claim 8 data packets from the first queue EDF are further processed according to their delivery deadlines, and data packets from the second queue FIFO are processed according to a first in – first out strategy. Advantageously, this puts the further processing of data packets under the established quality of service requirements into action.
- 20 According to claim 9, an output interface OI prioritises data packets in the first EDF and the second queue FIFO. Advantageously, a blocking of data packets in one queue can be avoided by choice of a priority-strategy, which guaranties to a certain extend read-outs of data packets from both queues.
- 25 According to claim 10, a throughput capability feedback is sent back along the data packet sub-stream's transmission path via a modified admission control packet. Advantageously, this allows intermediate communications system nodes or a traffic source to adapt the traffic to the available throughput capabilities. In this way,

rejections of data packets for real-time processing can be avoided to a high extend. The use of a modified admission control packet can avoid signalling overhead and a complex protocol structure.

5 According to claim 11, synchronisation control parameters are received from a header of an underlying network protocol. This allows payload encryption and authentication, and it supports the use of the so-called Internet protocols IPv4, IPv6 and IPSec, because synchronisation control parameters are not prevented from being read.

10

According to claim 12, deadline violations can be detected. Advantageously, this allows a triggering of countermeasures in order to guarantee the real-time processing of the data packets.

15 According to claim 13, a payload data packet adaptation takes place. This allows the keeping of delivery deadlines for data packets. It supports furthermore an efficient use of the packet scheduler and other system resources, and it can avoid rejection or dropping of data packets.

20 According to claim 14, admission control parameters are received from a header of an underlying network protocol. This allows payload encryption and authentication, and it supports the use of the so-called Internet protocols IPv4, IPv6 and IPSec, because admission control parameters are not prevented from being read.

25 According to claim 17, a network node that processes real-time data traffic comprises in addition a determining unit to determine a currently available throughput  $V$ , and a decision means for a decision about a real-time processing of an incoming data traffic flow. By means of the determining unit and the decision means it is possible to perform an admission control before deadlines are calculated



for payload data packets at a packet scheduler. Advantageously, delivery deadline violations for data packets due to throughput lacks can be avoided, because data packets requiring a higher throughput than available are not admitted for real-time processing. Also, unnecessary calculations of delivery deadlines are avoided.

5

According to claim 18, the network node comprises further a transfer unit to forward data packets that are admitted for real-time processing to the first queue EDF, and to forward data packets that are rejected for real-time processing to a second queue FIFO. This guaranties that all types of traffic can be processed. Data packets rejected for real-time processing can still be processed with best-effort quality.

10

In addition, an output interface OI prioritises data packets in the first EDF and the second queue FIFO. Advantageously, a blocking of data packets in one queue can be avoided by choice of a priority-strategy, which guaranties to a certain extend read-outs of data packets from both queues.

15

According to claim 19, the network node comprises further a deadline violation handler and an adaptation unit. Therefore, countermeasures against delivery deadline violations can easily be triggered in order to guarantee the real-time processing of the data packets. A preferred countermeasure is the payload data packet adaptation, which allows the keeping of delivery deadlines. It supports furthermore an efficient use of the system resources, and it can avoid a rejection or a dropping of data packets.

20

According to claim 20, the network node comprises further a radio base station. In a cellular communications network, and in particular in a radio access network, the available frequencies are limited resources. This results in limited bandwidths of communications channels. Advantageously, the present invention supports efficiently the provision of quality of service to clients requesting real-time

25

multimedia services. In particular, the radio base station can accept only those clients, whose communication requests can be fulfilled.

It is advantageous according to claim 23 that an admission control can easily be performed based on one or more admission control parameters  $R_l$  read from an admission control packet ACP, which is embedded in a data packet stream. A decision to admit a real-time processing of a sub-stream of data packets depends on a minimum throughput requirement given by said admission control parameters. Advantageously, congestion due to throughput lacks at network nodes or applications can be avoided, because data packets requiring a higher throughput than available are not admitted for real-time processing. In addition, the admission control can take into account a maximum throughput parameter  $R_h$ . Therefore, the admission controller can choose a more cost-effective throughput than the minimum required throughput  $R_l$  for a sub-stream of data packets, up to the maximum throughput  $R_h$  and in dependence of the available throughput.

A network operator can charge different fees for different throughput rates provided to the customer. In order to increase the operator's profit, said choice of a throughput rate for a sub-stream can be based on a gain-function provided by an operator, said gain function indicating e.g. cost per throughput-rate for the communications system, a network node or a transmission channel.

Furthermore, an upper throughput limit  $R_h$  can avoid buffer overflows in the communications system or at the receiver of the data packet stream, because it guaranties that data packets are not transmitted too fast.

Furthermore, it is advantageous to perform an admission control before deadlines are calculated for payload data packets. There is no need to calculate deadlines, if throughput requirements for a real-time processing of a sub-stream of data packets that are given by admission control parameters indicate under consideration of

available throughput capabilities, that these deadlines cannot be kept.

Advantageously, delivery deadline violations for data packets due to throughput lacks can be avoided, because data packets requiring another throughput than available are not admitted for real-time processing.

5

According to claim 24, a throughput capability feedback is sent back along the data packet sub-stream's transmission path via a modified admission control packet.

Advantageously, this allows intermediate communications system nodes or a traffic source to adapt the traffic to the available throughput capabilities. In this way,

10 rejections of data packets for real-time processing can be avoided to a high extend.

The use of a modified admission control packet can also avoid signalling overhead and a complex protocol structure.

According to claim 25 data packets that are rejected for real-time processing are

15 sorted into a second queue FIFO in their order of appearance. This allows an easy best-effort processing according to a first in - first out strategy for these data packets.

According to claim 26, data packets are prioritised for reading-out from the first

20 queue EDF and the second queue FIFO. Advantageously, a blocking of data packets in one queue can be avoided by choice of a priority-strategy, which guaranties to a certain extend read-outs of data packets from both queues.

According to claim 27, deadline violations can be detected. Advantageously, this

25 allows a triggering of countermeasures in order to guarantee the real-time processing of the data packets.

According to claim 28, an adaptation of payload data packets is performed. This

allows the keeping of delivery deadlines for data packets, in particular in the case of

congestion or traffic load peaks. It supports furthermore an efficient use of system resources, and it can avoid rejection or dropping of data packets.

According to claim 29 admission control parameters, and according to claim 30  
5 synchronisation control parameters are received from a header of an underlying network protocol. This allows payload encryption and authentication, and it supports the use of the so-called Internet protocols IPv4, IPv6 and IPSec, because admission control parameters are not prevented from being read.

10 A method, system and a computer program of the present invention will be further understood and appreciated from the following detailed description taken into conjunction with the figures. The following figures are showing:

#### **Brief description of the drawings**

- 15 Fig. 1a a video stream with different synchronisation entities,  
Fig. 1b another video stream with different synchronisation entities,  
Fig. 1c a data packet stream with an admission control packet ACP and  
synchronisation control packets SCPs,  
Fig. 2a parameters contained in a SCP,  
20 Fig. 2b parameters contained in a ACP,  
Fig. 3 tasks of an admission controller in a flow diagram,  
Fig. 4 a functional view of a packet scheduler,  
Fig. 5 tasks of a packet scheduler in a flow diagram.

#### **25 Detailed description of the invention**

Figure 1a shows a payload data packet traffic stream along a time axis  $t$ . The stream can be sent by a traffic source or an intermediate network node in a communications system, or it can be received at a network node like a packet scheduler or an admission controller, or it can be received from a software application like a

multimedia viewer. The payload data packet stream consists of several payload data packets 1, 2 and 3, which are sent or received over the time.

Depending on the characteristic of the payload, there are data packets that belong  
5 together and that build up a so-called synchronisation entity SE. Data packets  
belonging to a synchronisation entity SE have in common that all of them together  
must reach their destination within a fixed time interval due to real-time  
requirements. Furthermore, each synchronisation entity SE should have the property  
to be processed by the receiving application independently from any other packet of  
10 a succeeding synchronisation entity SE.

When considering video communication, a synchronisation entity SE could consist  
of one or more video frames, depending on the real-time characteristics and the  
playback buffer at the receiver. Regarding voice over internet protocol streams, the  
15 synchronisation entity SE could even be a single packet. In a so-called World-Wide-  
Web WWW session, the synchronisation entity SE can consist of data packets  
representing a whole web page including all objects like images and the Hypertext  
Markup Language HTML document structure.

20 In Figure 1a, all payload data packets 1 belong to a first synchronisation entity SE 1,  
all payload data packets 2 belong to a second synchronisation entity SE 2 and all  
payload data packets 3 belong to a third synchronisation entity SE 3. This  
configuration puts restrictive delay requirements with respect to the overall end to  
end delays on a packet scheduler that receives the data packet stream in a  
25 communications network.

Figure 1b shows in an alternative traffic scenario a video stream having two video  
frames within one synchronisation entity. The first video frame comprises payload  
data packets 1, the second frame comprises payload data packets 2. This scenario

forces the receiver to buffer two synchronisation entities before playback. Here the synchronisation entity SE 1 overlaps the synchronisation entity SE 2.

Figure 1c shows a data packet stream without overlapping synchronisation entities.

5 Certain control data packets SCP, ACP are embedded into the stream by a traffic source or an intermediate gateway. A synchronisation control packet SCP precedes a synchronisation entity SE, and it distinguishes one from another. It contains synchronisation control parameters related to the succeeding synchronisation entity SE.

10

In a preferred embodiment of the present invention a traffic source inserts in addition admission control packets ACP into the packet stream. An admission control packet ACP includes parameters that characterise a sub-stream of data packets regarding its throughput requirements for real-time processing. A

15 sub-stream shall be understood as a set of data packets that follows an admission control packet ACP until another admission control packet. Alternatively, the number of data packets assigned to an admission control packet could be included in the admission control packet as a control parameter defining the sub-stream by its length.

20

The identification of payload data packets as belonging to a certain synchronisation entity SE or to a certain sub-stream via a number that is included as a control parameter in the synchronisation control packet SCP or in the admission control packet ACP and that defines the length of the synchronisation entity or the

25 sub-stream can preferably be used, if real-time data traffic and other data traffic like best-effort traffic are mixed in one packet data stream.

Admission control packets ACP may be repeatedly sent while the data transmission holds on. A traffic source may use in this way admission control packets ACP to signal changes in its resource usage.

- 5 In a further embodiment of the present invention, the admission controller sends back a modified admission control packet ACP towards the packet source. This mechanism enables intermediate nodes or the packet source to react on negative admissions of data packets for real-time processing.
- 10 Admission control packets ACP can be repeated also at arbitrary time intervals, in order to refresh resource reservations. The possibility to repeatedly send them is especially useful in networks where the routing path of a multimedia stream may change, like in the fixed network part of a mobile communication network. A copy of the actual admission control packet ACP can then be forwarded from dedicated
- 15 control nodes or can be even repeated within the packet stream in regular time intervals to allow control nodes at network bottlenecks the determination of actual resource requirements.

- In a further embodiment of the present invention, the synchronisation control
- 20 parameters and admission control parameters are inserted from the traffic source or an intermediate gateway into the header of an underlying network protocol. This is especially useful, if payload encryption and authentication mechanisms are used. Internet protocols like IPv4 and IPv6 allow inserting an optional header extension that can carry the admission control and synchronisation control parameters. When
- 25 using the so-called IPSec protocol, the Internet protocol header is authenticated by an additional authentication header. Therefore, the reading of admission control and synchronisation control parameters is not prevented.

In a further embodiment of the present invention an intermediate station between source and packet scheduler has a key knowledge of the transmitted data packet stream. It forms a trusted device for the end-user, like e.g. a mobility gateway maintained by a network provider. In this case, special header and payload  
5 encryption for the transmission over a wireless link are used when so-called IP tunnelling takes place between communications parties.

The present invention allows with the help of the synchronisation information contained in the synchronisation control packet SCP the determination of an  
10 individual delivery deadline for each payload data packet of a synchronisation entity SE, e.g. at a packet scheduler. Figure 2a shows a preferred embodiment of the content of a synchronisation control packet SCP. It contains as parameters a number N of packets that belong to its referred synchronisation entity SE, an overall size S of all payload data packets of this synchronisation entity SE and a maximum  
15 transmission time I, in which the whole synchronisation entity SE has to pass the packet scheduler.

Alternatively, the maximum transmission time I could be defined as the time, in which the synchronisation entity SE has to reach its final destination. In this case,  
20 the packet scheduler would be allowed to use up only a part of this transmission time for processing of the synchronisation entity SE.

In addition, the synchronisation control packet SCP may contain an identifier ID that refers to the belonging admission control packet ACP. This identifier can be  
25 used to verify whether a synchronisation entity belongs to a certain sub-stream.

Additionally, the synchronisation control packet may contain other parameters, which support the identification of payload data packets as belonging to its control parameters. This might be necessary, if the transmission order of data packets is



changed during their transmission from a traffic source or an intermediate network node to the packet scheduler, to another network node, or in general, to a device or an application, which utilises the synchronisation control parameters.

- 5     Supposing the transmission order of the data packet is not changing, packets are belonging to a specific synchronisation entity SE when they follow up an synchronisation control packet SCP and have not an index greater than N, starting at the first packet that follows directly the synchronisation control packet SCP. In order to distinguish synchronisation entities SE belonging to different packet flows, data packets can also be marked with a flow label by an underlying network  
10     protocol. The synchronisation control packet SCP carries the same flow label than its data packets.

- In general, a synchronisation control packet SCP contains parameters necessary for  
15     determining delivery deadlines of payload data packets belonging to a synchronisation entity SE. Depending on the traffic type and the corresponding applications, in a certain embodiment of the present invention the synchronisation control packet SCP may contain just one parameter like an absolute or relative time value for a deadline. In another scenario, a synchronisation control packet may  
20     contain additional control parameters used inter alia for a re-arrangement of the data packet order. Therefore, the content of the synchronisation control packet SCP as shown in figure 2a should be understood only as one possible embodiment.

- Figure 2b shows a preferred embodiment of admission control parameters contained  
25     in an admission control packet ACP. An admission control packet ACP contains, in general, throughput parameters characterising the throughput requirements due to real-time constraints for the processing of a sub-stream of data packets by a packet scheduler. A throughput requirement in the sense of the present invention can be

either a fixed requirement or an average requirement, and it can be given either by fixed throughput rate parameters or by average throughput parameters.

The parameter  $R_l$  gives the lowest required throughput that is necessary for real-time processing of the sub-stream. If this minimum requirement cannot be fulfilled, the sub-stream has either to be rejected for real-time processing, or it has to be processed under a best effort strategy. For example, a mobile terminal could request via this parameter certain data throughput conditions to be provided by the access network's radio base station. Then the radio base station decides, whether the mobile station can be accepted as a client.

Additionally, by an optional parameter  $R_h$  a highest desired throughput can be requested. This allows the admission controller, or in general a network node or an application, to choose a throughput rate within the given interval of minimum required throughput  $R_l$  and maximum desired throughput  $R_h$ . Said choice might be based on a gain-function provided by a network operator, e.g. a linear gain function indicating cost or profit per throughput, or it might be based on other cost-estimations. Said choice of a certain throughput according to a gain function might also influence one or more sub-streams of data packets, or in general communications connections, that have been admitted already by the admission controller for real-time processing at the packet scheduler, each with a certain throughput. Their throughputs might be decreased in order to increase the throughput that is available for a sub-stream, or in general a communications connection, that is currently under the process of admission by the admission controller. Therefore, the profit for a network operator can be increased by fulfilling the most monetarily valuable throughput requirements up to the upper throughput value  $R_h$ .

Furthermore, the limit  $R_h$  of the data throughput might be necessary due to buffer limitations or processing-speed restrictions at the data packet's destination-application. An exceeding of the maximum data throughput condition could cause inter alia buffer overflow errors or the rejection of payload data packets at the receiver's site.

A further optional parameter is a maximum scheduling tolerance  $D$  for use in the case of delivery deadline violations of payload data packets. The parameter  $D$  gives the tolerance, of which either a single payload data packet, a synchronisation entity or the whole sub-stream might be delayed.

Furthermore, an optional type parameter  $T$  characterises the type of data traffic, e.g. MPEG, Voice over IP or others. According to the traffic type, a packet scheduler can select an appropriate adaptation method for payload data packets in the case of deadline violations.

In addition, the admission control packet ACP may contain an identifier  $ID$  to be used to identify synchronisation control packets that belong to the sub-stream controlled by the admission control packet ACP.

Additionally, the admission control packet may contain other parameters, which support the identification of data packets as belonging to it. This might be necessary, if the transmission order of data packets is changed during their transmission from a traffic source or an intermediate network node to the packet scheduler, network node, or in general, to the device or application, which utilises the admission control parameters.

Figure 3 describes in a preferred embodiment of the present invention the admission control. An admission control packet ACP is received at an admission controller 10,

or in general, at a network node or an application. The admission control packet ACP refers to a following sub-stream carrying real-time data traffic. The admission controller reads out admission control parameters  $R_l$ ,  $R_h$ ,  $T$  from the admission control packet ACP 20. In one embodiment, the controller reads out just the  
5 minimum throughput parameter  $R_l$ . In another embodiment, shown in figure 3, the controller reads out the three parameters  $R_l$ ,  $R_h$ ,  $T$ .

Then, the admission controller determines the currently used throughput  $V_c$  at the controller 30. This can be done inter alia by counting of a number of bits that are  
10 transmitted currently by the admission controller per time. In particular, the measurement of the currently used throughput might take into consideration real-time data traffic only, because the delivery of other traffic type can easily be delayed without any time constraint violations. In the latter case, the packet scheduler might provide the currently used throughput parameter  $V_c$ , because the  
15 packet scheduler knows the type of traffic, which is currently processed.

In the next step 40, the admission controller determines the available throughput  $V$  by calculation of the difference between the maximum available throughput  $V_{max}$  at the controller and the currently used throughput  $V_c$ . The admission controller  
20 knows the maximum throughput capability  $V_{max}$  either as a fixed value, from a lookup-table, by channel measurements, by messaging or by a request.

Then, the controller compares the available throughput  $V$  with the required throughput  $R_l$  50. If the available throughput  $V$  is higher than or equal to the  
25 required throughput  $R_l$ , the controller can admit the real-time processing of the sub-stream of data packets that belongs to the admission control packet ACP. In the embodiment shown in figure 3, the admission controller in addition calculates a minimum  $M$  of the available throughput  $V$  and the maximum desired throughput  $R_h$  60. In the next step 70, the admission controller chooses a most monetarily valuable

throughput rate for the sub-stream from a range given by the minimum required throughput  $R_l$  and by the minimum  $M$ . This can be done by a choice according to a gain function provided by a network operator, e.g. a linear throughput-profit function.

5

In another embodiment, the controller could preliminary choose a monetarily valuable throughput rate out of the range given by the minimum required throughput  $R_l$  and the maximum throughput  $R_h$ . If the chosen throughput value is not available, the controller can trigger an adaptation of sub-streams that are already admitted for  
10 real time processing at the packet scheduler in order to make said chosen throughput value available. Data packets of a sub-stream that is admitted for real-time processing are sent to a packet scheduler 80. The information, whether they are admitted for real-time processing, can be given from the admission controller to the scheduler either via signalling or by use of a dedicated transmission channel or a  
15 dedicated port at the packet scheduler reserved for real-time traffic. If a throughput rate has been chosen, it can be communicated to the packet scheduler or to an output interface OI in a similar way in order to be considered for a further processing of the sub-stream.

20 Data packets of a sub-stream that is not admitted for real-time processing are rejected. One way to perform this rejection is the dropping of data packets by the admission controller with or without further notice to another party like the traffic source, an intermediate gateway or the receiver. One way of notification can be to send from the admission controller a modified admission control packet ACP  
25 containing a negative acknowledgement, but also other signalling mechanisms could be used. Alternatively, data packets that are subject for rejection can be buffered, and a negotiation with the sender (traffic source or intermediate gateway) about the throughput requirements can be started (e.g. via an exchange of admission control packets). In another embodiment of the invention data packets of a sub-stream are

sent to a packet scheduler for regular processing instead of real-time processing. The regular processing then follows e.g. a best effort approach or a FIFO-strategy (first in – first out). The information, whether data packets that are sent to the packet scheduler are admitted for real-time processing, is given, as described above, to the scheduler either via signalling or by use of a dedicated transmission channel or a  
5 dedicated port for this transmission.

In the embodiment of the present invention shown in figure 3, a feasibility of an adaptation of data packets that are currently scheduled for real-time processing at  
10 the packet scheduler and that occupy the currently available throughput  $V_c$  is checked 90 and, if feasible, performed to increase the available throughput  $V$  at the packet scheduler 110. If the adaptation is not feasible, the sub-stream is finally rejected 100.

15 An adaptation of payload data packets that are currently scheduled for real-time processing, e.g. in a earliest-deadline-first queue EDF, can be done for example either by using of a different or more effective compression scheme, by dropping of certain packets or other traffic type dependent mechanisms. The appropriate adaptation method is chosen under consideration of the data traffic type  $T$ , like e.g.  
20 decreasing the resolution of a MPEG video-stream, dropping of some Voice over IP packets, converting 256-colour pictures to 16-color pictures etc. Usually, these well-known methods of adaptations can be performed 'on the fly' and result in a higher available throughput  $V$ .

25 After said adaptation, the currently used throughput  $V_c$  is determined 120, and the available throughput  $V$  is calculated 130. Then a final decision according to the above described criteria 50 and including the above described choice of a throughput value 60, 70 is taken about admission 80 or rejection 100 of the sub-stream for real-time processing.

Figure 4 shows a packet scheduler that includes an admission controller AC for admitting or rejecting a sub-stream of data packets for real-time processing, a first queue EDF for data packets admitted for real-time processing, and a second queue  
5 FIFO for data packets to be processed according to a best effort strategy like first in-first out. The second queue FIFO is used for data packets, which are rejected for real-time processing. Further embodiments of the packet scheduler may include more than one time-stamp based EDF queue and more than one FIFO queue, e.g. in order to increase the capacity of the scheduler.

10

By sending a sub-stream of data packets to the first queue EDF, the admission controller admits data packets for real-time processing. This first queue EDF is time-stamp based and operates according to an earliest-deadline-first strategy. Each data packet sorted into the EDF queue gets a time stamp, whose value is set to a  
15 delivery deadline of the data packet, which can be calculated from synchronisation control parameters provided by a synchronisation control packet. For the read-out, the EDF queue provides always the data packet with the closest delivery deadline. Therefore, the EDF queue can keep track of all delivery deadlines and corresponding data packets for a direct-access processing of a data packet with the  
20 closest delivery deadline, or alternatively, it can re-sort the payload data packets according to their delivery deadlines after each new data packet transmitted into the EDF queue to provide in a way of sequential processing always the data packet with the closest delivery deadline at the output of the EDF queue.

25 The packet scheduler includes an output interface OI, which prioritises data packets contained in the queues for further processing. This comprises the choice of a queue, the read-out of a data packet from this queue, and the provision of the data packet for further processing. Different strategies for the choice of a queue are possible, like either preferring always the EDF queue until it is empty or until a

certain threshold is reached, or a strategy that is based on a fixed rate of read-outs per queue, or a strategy of dynamically determining a read-out rate, e.g. under consideration of the traffic type T. The provision of data packets for further processing can be done by a transmission of data packets over a communications  
5 channel, by polling mechanisms or others.

Figure 5 shows tasks of a packet scheduler for an incoming sub-stream of data packets that is sent from an admission controller. If the sub-stream is admitted for real-time processing 210, an individual delivery deadline is calculated for each  
10 payload data packet 230. The admission for real-time processing can be recognised by the packet scheduler either via signalling messages received from the admission controller or via the arrival of a data packet over a dedicated communications channel or at a dedicated port reserved for real-time traffic. In the embodiment shown in figure 5 all data packets received at the packet scheduler and admitted for  
15 real-time processing are forwarded to the EDF queue 220, and all other data packets are forwarded to 250 and sorted into a second queue FIFO in their order of appearance 260, which is operated according to a best-effort strategy.

The packet scheduler reads synchronisation control parameters from a  
20 synchronisation control packet SCP received at the EDF queue for determining by calculation an individual delivery deadline for each payload data packet sent to the EDF queue. In a preferred embodiment, this deadline represents the latest allowed delivery time by the packet scheduler. Alternatively, the deadline could represent a latest arrival time at the data packet's destination. For the deadline, an absolute time  
25 or a timer-based time value can be used. In the next step 240, the payload data packet is sorted into the EDF queue and a time stamp of the EDF queue is set to the delivery deadline. The payload data packets sorted into the queues are ready for further processing, e.g. by an output interface OI, according to the description above.



In a preferred embodiment of the invention, the delivery deadline for an individual payload data packet is calculated from synchronisation control parameters  $S$ ,  $N$  and  $I$ . Furthermore, a number  $i$  of the packet, and a current arrival time  $t$  of the packet  
5 are used for the calculation. In addition, a packet error rate  $P_j$  and a bit rate  $R_j$  of a channel  $j$ , for which the packet scheduler schedules the packet transfer for a further transmission are used in the calculation. The latter values indicate, how fast the real-time queue becomes empty.

10 The number  $i$  is the sequence number of a packet in a synchronisation entity  $SE$ , with  $i \in \{1..N\}$ . It is determined e.g. at the packet scheduler, by counting the incoming payload data packets that belong to a certain synchronisation entity  $SE$ .

The time value  $t$  represents an arrival time of the individual payload data packet at  
15 the admission controller. It can be determined by the admission controller and signalled to the packet scheduler. Alternatively, an arrival time at the packet scheduler could be used instead, if this time is not significantly different. In the latter case, the packet scheduler determines the packet's arrival time.

20 In general, the packet error rate  $P_j$  is retrieved from link layer measurements. For example, in a so-called WCDMA system the packet error rate  $P_j$  of a channel can be determined from a signal to noise ration by a so-called closed loop power control.

In other embodiments of the present invention, an error rate per timeslot, per client  
25 or per network can be used for the determination of the delivery deadline. In a preferred embodiment, selective repeat is used as link layer error correction.

The bit rate  $R_j$  can be determined at the admission controller or at the packet scheduler, e.g. by counting of the incoming bits.

In a preferred embodiment of the invention, the deadline for each payload data packet is calculated as follows:

$$deadline_i = t + I - \frac{(N - i + 1) * S}{N * (1 - P_j) * R_j}, \quad \text{with } i \in \{1..N\}.$$

5

In a further preferred embodiment, the packet scheduler detects violations of delivery deadlines for payload data packets sorted into the EDF queue by comparing their delivery deadlines with an actual time value, e.g. the time a data packet has spent in the EDF queue, determined by use of a system time. If a violation is  
10 detected, an adaptation of payload data packets is performed according to the methods described earlier.

Different real-time applications allow different delay tolerances. One way to perform the adaptation in this context, is the use of the admission control parameter  
15 D, which defines a delay tolerance for a specific sub-stream of data packets. If a certain level of deadline violation is detected, an adaptive framework can degrade one or more sub-streams in order to enter a stable state.

The present invention can be embodied in a network node of a communications  
20 system, which comprises in general a packet scheduler and an admission controller. In particular, the present invention can be embodied in said network node by a packet error rate determining unit, which determines the packet error rate  $P_j$  of the communications channel  $j$  used for a further transmission of data packets from the network node, by a bit rate determining unit, which determines the bit rate  $R_j$  of said  
25 channel, by a timer, which determines a current arrival time  $t$  of a data packet at the network node, by an evaluation means, which evaluates control parameters  $I, S, N, R_h, R_l, D, T$  given by control data packets SCP, ACP emdedded in a data packet traffic flow, by a calculator unit, which calculates delivery deadlines, and by a first

queue EDF, which receives data packets to be scheduled according to their deadlines.

5 In a further embodiment, the first queue EDF can contain a sorting unit, which sorts data packets into the first queue EDF, and which assigns calculated delivery deadlines as time-stamps to these data packets. The sorting unit operates according to an earliest-deadline-first strategy.

10 Furthermore, the network node may include a determining unit, which determines a currently available throughput  $V$ , e.g. according to the method described earlier. A decision means admits an incoming traffic flow or a sub-stream of data packets for real-time processing after it has checked throughput requirements given by admission control parameters and the available throughput  $V$ . In addition, the decision means may include e.g. a gain function via a look-up table in order to  
15 choose a most monetarily valuable throughput rate for a traffic flow or a sub-stream. The decision means can admit or reject a real-time processing of data packets according to the method described above.

20 A second queue FIFO can receive data packets, which are rejected for real-time processing. A transfer unit builds an interface for a distribution of data packets, sub-streams or traffic flows to the appropriate queue, i.e. a rejected sub-stream to the second queue FIFO, and an admitted sub-stream to the first queue EDF.

25 An output interface can prioritise all queues according to the already described method.

The network node can include in addition an adaptation unit for adaptation of at least one payload data packet. The adaptation can be performed for data packets contained in the first queue EDF, or also for data packets that reach the network

node. Furthermore, the network node can include a deadline violation handler, which monitors delivery deadlines of payload data packets sorted into the first queue EDF, and which initiates an adaptation of payload data packets in the case of delivery deadline violation in order to return to a stable system status. The  
5 adaptation can also be triggered by the decision means, e.g. based on a gain function in order to optimise the operator's profit.

In another preferred embodiment, packet scheduling and admission control is performed at a radio base station of a packet switched cellular radio access network.  
10 Alternatively, the invention may be used also in applications executed on end-user terminals.

In another embodiment, the present invention may be implemented as a computer program (also called application) or a computer program product for use with a  
15 processing device like a computer, a mobile phone or another communications device. The delivery of the computer program to said processing device can be done inter alia by read only memory ROM devices, so-called CD-ROM disks, floppy disks, hard disks, through a communications medium like a network, via a modem or by radio via an air interface.

20 Further to a normal operation of the processing device, software code portions of the computer program, respectively the computer program product by its stored program, perform a packet scheduling and/or an admission control, if the computer program is executed on the processing device.

25 In general, said computer program performs during execution instructions in the sense of the earlier described method for packet scheduling and/or admission control.

In particular, for admission control the software code portions of the computer program, which is loaded into a memory of and executed on a digital computer, perform first the step of detecting an admission control packet ACP in a data packet stream. This can be done by comparing a known structure of the admission control packet ACP with a structure of a currently received data packet. If an admission control packet ACP is found, its control parameters  $R_h$ ,  $R_l$  are read out. In the next step, an available throughput  $V$  at the processing device is calculated as a difference of a total throughput  $V_{max}$  that the processing device can handle and that is given as a fixed value to the application, and a currently occupied throughput, which can be provided by the processing device, e.g. by link layer measurements. In a further step, the computer program compares the required throughput  $R_l$  with the available throughput  $V$ . If the available throughput  $V$  is lower than the required throughput  $R_l$ , the sub-stream that belongs to the admission control packet ACP is rejected. Otherwise, a throughput value is chosen out of a range given by the required throughput  $R_l$  and a second throughput value. Said second throughput value is the minimum of the available throughput  $V$  and the highest desired throughput  $R_h$ . In another embodiment, the second throughput value is provided as it is described earlier from the processing device by a gain function. After the choice of said throughput value the sub-stream is admitted for real-time processing.

20

In a further embodiment, the software code portions performing the admission control generate a modified admission control packet, which comprises throughput capabilities like  $V_{max}$  and  $V$  of the processing device. Said modified admission control packet is sent back along the transmission path of the sub-stream due to the earlier described reasons.

25

Additional software code portions of the computer program or alternatively, software code portions of a further computer program perform on execution a packet scheduling. First, a synchronisation control packet is detected in a data

packet stream. Then, its synchronisation control parameters N, I and S are read out. For each payload data packet that belongs to a synchronisation entity SE that the synchronisation control packet SCP refers to, a delivery deadline is calculated after a packet error rate of a transmission channel j that is foreseen for a transmission of  
5 payload data packets from the packet scheduling application, a bit rate of said channel, and a timer value t, which indicates a current arrival time of payload data packets at said application, are determined, e.g. by measurements or by polling routines from the processing device. The payload data packets are sorted in the order of their deadlines into a queue EDF, which provides a time stamp for each  
10 data packet slot. Each time stamp of a slot is individually set to the calculated delivery deadline of that data packet sorted into the slot.

In a further preferred embodiment of the invention, delivery deadlines are calculated only for those data packets, which are admitted for real-time processing.  
15

Data packets, which are rejected for real-time processing by the computer program, can be sorted in a second queue FIFO in order to be processed according to a best effort strategy.

20 Furthermore, the computer program may instruct the processing device to perform a prioritisation of both queues during read-outs of data packets in order to favour the processing of data packets admitted for real-time processing.

In a further embodiment, software code portions of the computer program instruct  
25 the processing device to monitor the delivery deadlines of payload data packets sorted into the first queue EDF by comparing an actual time value giving either an absolute or a relative time with the delivery deadlines stored in the time stamps. Doing so, the computer program can detect delivery deadline violations. In a further

step, an adaptation of payload data packets of the first queue EDF can be performed, or alternatively, can be requested from a separate application.

In order to handle also data packet streams utilising payload data encryption or other security mechanisms, the computer program can provide software code portions to  
5 read synchronisation control parameters and/or admission control parameters from the header of an underlying network protocol, in addition to or instead of reading them from a data packet SCP ACP itself.

- 10 Furthermore, a method comprising the following steps can be performed:  
detecting in a data packet stream, which carries real-time data traffic, and which is received at an admission controller AC, a first admission control packet ACP comprising admission control parameters, reading at least two admission control parameters  $R_l$ ,  $R_h$  from said first admission control packet, calculating a throughput  
15  $V$  as a difference of a total throughput  $V_{max}$  available at said admission controller AC and a currently occupied throughput  $V_c$ , comparing the throughput  $V$  with the required throughput  $R_l$ , and if the available throughput  $V$  is lower than the lowest required throughput  $R_l$  then rejecting a real time processing of a sub-stream of data packets that follows between said first admission control packet and a second  
20 admission control packet, or else choosing a throughput value from a range of throughput values, said range including as limits the lowest required throughput  $R_l$  and a second throughput value  $R_h$ ,  $M$  and admitting a real-time processing of said sub-stream. In addition to the steps above, the step of generating and sending back from the admission controller AC along the sub-stream's transmission path a  
25 modified admission control packet comprising throughput capability parameters of said admission controller AC is preferably performed in a further embodiment.

Although both aspects are only described in combination in the claims, the steps of the latter described embodiments referring to aspects of admission control can

optionally be independent of steps referring to aspects of synchronisation control.

Both aspects can be implemented, e.g. by a corresponding method or a corresponding computer program, independently from each other.

- 5 While the invention has been described in connection with what is presently considered as practical and preferred embodiments, it is not limited to the disclosed embodiments, but on the contrary, it is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the claims.



## Claims

1. A method for processing in a communications system a data packet stream carrying real-time data traffic, with the steps of
  - 5 - receiving a first synchronisation control packet (SCP) that includes a number of  $p$  synchronisation control parameters, with  $p = 1, 2, 3, \dots$ ,
  - reading at least one synchronisation control parameter from the synchronisation control packet (SCP),
  - receiving at least one payload data packet,
  - 10 - determining for each payload data packet a delivery deadline, and
  - sorting the at least one payload data packet according to its determined delivery deadline into a first queue (EDF) and setting a time stamp in the first queue (EDF) to the determined delivery deadline.
- 15 2. The method according to claim 1, wherein the step of reading at least one synchronisation control parameter comprises the reading of
  - a number of packets ( $N$ ) in a synchronisation entity,
  - a maximum transmission time ( $I$ ),
  - a byte-size ( $S$ ) for each payload packet,
  - 20 and wherein the determination of the delivery deadline for each payload data packet comprises the steps of
  - determining a packet error rate ( $P_j$ ) of a channel ( $j$ ) used for transmitting the synchronisation entity,
  - determining a bit rate ( $R_j$ ) of said channel ( $j$ ),
  - 25 - determining a time value ( $t$ ) indicating a current arrival time of payload data packets, and
  - calculating the delivery deadline therefrom.

3. The method according to claim 2, wherein the delivery deadline for a current payload data packet  $i$  is calculated as follows:

$$deadline_i = t + I - \frac{(N - i + 1) \cdot S}{N \cdot (1 - P_j) \cdot R_j}, \quad i \in \{1..N\}.$$

- 5 4. The method according to claim 1, 2 or 3 with the additional steps of
- receiving a first admission control packet (ACP) that includes a number of  $q$  admission control parameters, with  $q = 1, 2, 3, \dots$ ,
  - reading from said first admission control packet (ACP) at least one admission control parameter indicating a throughput (RI) required for a real-time
  - 10 processing of a sub-stream of data packets, which is received after the first admission control packet and before a second admission control packet,
  - determining a currently available throughput (V),
  - comparing the available throughput (V) with the required throughput (RI),
  - admitting the real-time processing of the sub-stream, if the available
  - 15 throughput (V) is higher than or equal to the required throughput (RI), and sending said sub-stream to a packet scheduler.
5. The method according to claim 4, wherein
- the step of reading the at least one admission control parameter comprises the
  - 20 reading of a maximum throughput (Rh),
  - with the additional step of
  - choosing for a sub-stream a throughput between the minimum required throughput (RI) and a minimum of the maximum throughput (Rh) and the available throughput (V).
  - 25
6. The method according to claim 4 or 5, with the additional step of
- rejecting the real-time processing of the sub-stream, if said sub-stream is not

admitted for real-time processing, and sending said sub-stream to the packet scheduler.

7. The method according to claim 6, with the additional step in the case of  
5 rejection of the sub-stream for real-time processing, of  
– sorting at the packet scheduler the data packets in their order of appearance into a second queue (FIFO).
8. The method according to claim 7, with the additional steps of  
10 – further processing the data packets from the first queue (EDF) according to their delivery deadlines, and  
– further processing the data packets from the second queue according to a first in – first out strategy.
- 15 9. The method according to claim 6, 7 or 8, with the additional step of  
– prioritising by an output interface for the further processing data packets contained in the first queue (EDF) and data packets contained in the second queue (FIFO).
- 20 10. The method according to any of the claims 4 to 9, with the additional step of  
– generating and returning from an admission controller (AC) along the sub-stream's transmission path a modified admission control packet comprising throughput capability parameters of said admission controller (AC).
- 25 11. The method according to any of the claims 1 to 10, with the further step of  
– receiving the synchronisation control parameters from a header of an underlying network protocol.

12. The method according to any of the claims 1 to 11, with the further step of  
– detecting a deadline violation by repeatedly comparing for payload packets sorted into the first queue (EDF) their actual time spent in said first queue with their deadlines according to their time stamps.
- 5
13. The method according claim 12, with the further step of  
– performing after detecting the deadline violation an adaptation of at least one payload data packet of the first queue (EDF).
- 10
14. The method according to any of the claims 1 to 13, with the further step of  
– receiving the admission control parameters from a header of an underlying network protocol.
15. A network node in a communications system for processing real-time data  
15 packet traffic, comprising  
– a packet error rate determining unit to determine a packet error rate ( $P_j$ ) of a communications channel ( $j$ ) ,  
– a bit rate determining unit to determine a bit rate ( $R_j$ ) of said communications channel ( $j$ ),  
20 – a timer to determine for at least one data packet that is received at the network node a current time value ( $t$ ),  
– an evaluation means to evaluate control parameters given by at least one control packet (ACP, SCP) embedded in a traffic flow,  
– a calculator unit for calculations of deadlines for data packets, and  
25 – a first queue (EDF) for data packets.
16. The network node according to claim 15, wherein the first queue (EDF) includes a sorting unit to sort data packets according to their deadlines into the first queue (EDF), said sorting unit following an earliest deadline first strategy, and wherein

said sorting unit sets time stamps of the first queue (EDF) according to calculated deadlines.

17. The network node according to claim 15 or 16, comprising in addition
- 5       - a determining unit to determine a currently available throughput (V) of the network node, and
- a decision means to decide, whether an incoming data packet traffic flow can be processed at the network node according to real-time requirements given by admission control parameters.
- 10
18. The network node according to any of the claims 15 to 17, further comprising
- a second queue (FIFO) for data packets that are not admitted for real-time processing,
- a transfer unit to forward a data packet traffic flow after a positive decision by
- 15       the decision means to the first queue (EDF) or after a negative decision to the second queue (FIFO), and
- an output interface (OI) that prioritises all queues and that reads out data packets from all queues.
- 20
19. The network node according to any of the claims 15 to 18, further comprising
- a deadline violation handler for monitoring of deadlines of data packets, for a detection of at least one deadline violation, and for an initiation of an adaptation of at least one data packet, and
- an adaptation unit for the adaptation of at least one data packet.
- 25
20. The network node according to any of the claims 15 to 19, further including a radio base station for receiving and transmitting of said real-time data packet traffic.

21. A computer program,  
 loadable into a memory of a digital computer,  
 comprising software code portions for performing the steps of  
 - detecting in a data packet stream, which carries real-time data traffic, and  
 5 which is received at a packet scheduler, at least one synchronisation control  
 packet (SCP), which is followed by a synchronisation entity that comprises at  
 least one payload data packet, said synchronisation control packet comprising  
 synchronisation control parameters,  
 - reading from the synchronisation control packet a number of packets in the  
 10 synchronisation entity (N), a maximum transmission time (I) allowed for a real-  
 time transmission of the synchronisation entity and a byte-size (S) of the  
 synchronisation entity,  
 - determining a packet error rate (Pj) of a channel (j) that is used for transmitting  
 said sub-stream,  
 15 - determining a bit rate (Rj) of said channel,  
 - determining a time value (t) indicating a current arrival time of payload data  
 packets, and,  
 - calculating for each payload data packet a delivery deadline therefrom,  
 - sorting each payload packet according to its deadline into a time stamp based  
 20 first queue (EDF), and setting a time stamp of the first queue to the calculated  
 deadline,  
 when said computer program is executed on a computer.

22. The computer program according to claim 21, wherein the delivery deadline for  
 25 a current payload data packet (i) is calculated as follows:

$$deadline_i = t + I - \frac{(N - i + 1) \cdot S}{N \cdot (1 - P_j) \cdot R_j}, \quad i \in \{1..N\}.$$

23. The computer program according to claim 21 or 22, further comprising software code portions for performing the steps of
- detecting in the data packet stream, which carries real-time data traffic, and which is received at an admission controller (AC), a first admission control packet (ACP) comprising admission control parameters,
  - reading at least two admission control parameters ( $R_l$ ,  $R_h$ ) from said first admission control packet,
  - calculating a throughput ( $V$ ) as a difference of a total throughput ( $V_{max}$ ) available at said admission controller (AC) and a currently occupied throughput ( $V_c$ ),
  - comparing the throughput ( $V$ ) with the required throughput ( $R_l$ ), and
  - if the available throughput ( $V$ ) is lower than the lowest required throughput ( $R_l$ ) then rejecting a real time processing of a sub-stream of data packets that follows between said first admission control packet and a second admission control packet, or else choosing a throughput value from a range of throughput values, said range including as limits the lowest required throughput ( $R_l$ ) and a second throughput value ( $R_h$ ,  $M$ ) and admitting a real-time processing of said sub-stream.
24. The computer program according to claim 23, further comprising software code portions for performing the steps of
- generating and sending back from the admission controller (AC) along the sub-stream's transmission path a modified admission control packet comprising throughput capability parameters of said admission controller (AC).
25. The computer program according to any of the claims 23 to 24, further comprising software code portions for performing the step of
- sorting the data packets of a sub-stream that is rejected for real-time processing in their order of appearance into a second queue (FIFO).

26. The computer program according to claim 23, 24 or 25, further comprising software code portions for performing the step of  
– prioritising for reading-out data packets contained in the first queue (EDF) and  
5 data packets contained in the second queue (FIFO).
27. The computer program according to any of the claims 21 to 26, further comprising software code portions for performing the step of  
– detecting a delivery deadline violation by repeatedly comparing for data  
10 packets sorted into the first queue (EDF) an actual time value with their deadlines according to their time stamps.
28. The computer program according to claim 27, further comprising software code portions for performing the steps of  
15 – performing after detecting the delay violation an adaptation of at least one data packet of the first queue (EDF).
29. The computer program according to any of the claims 23 to 28, further comprising software code portions for performing the step of  
20 – reading the admission control parameters from a header of an underlying network protocol.
30. The computer program according to any of the claims 21 to 29, further comprising software code portions for performing the step of  
25 – reading the synchronisation control parameters from a header of an underlying network protocol.



FIG. 1a

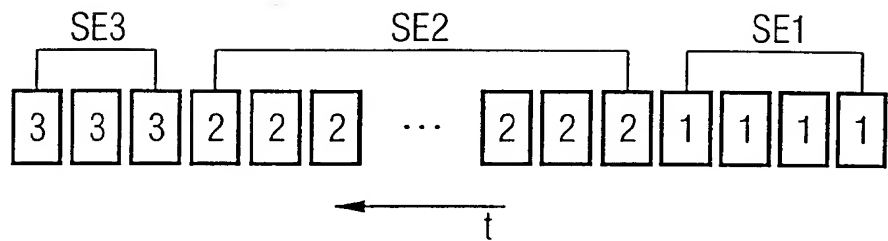


FIG. 1b

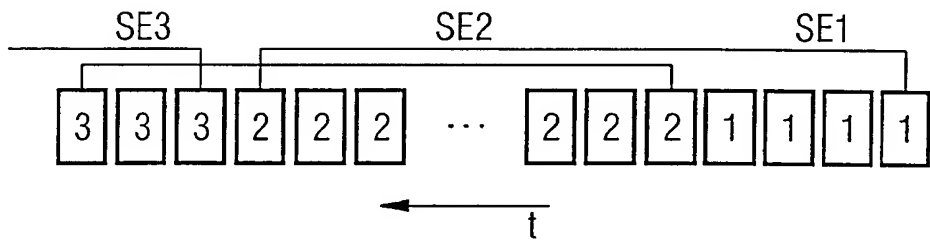


FIG. 1c

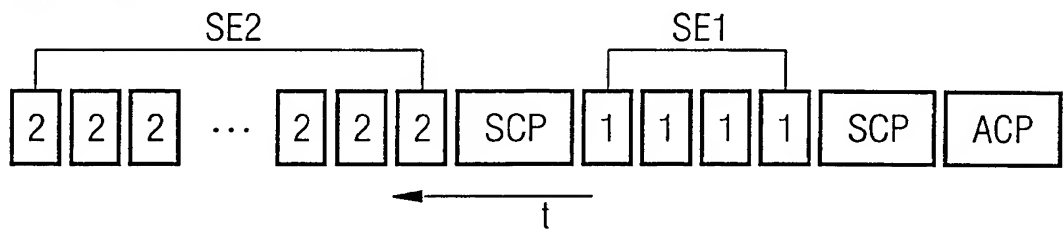


FIG. 2a




FIG. 2b

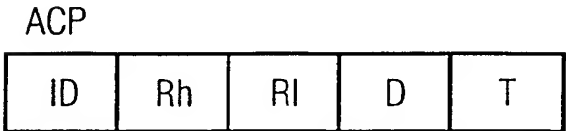


FIG. 3

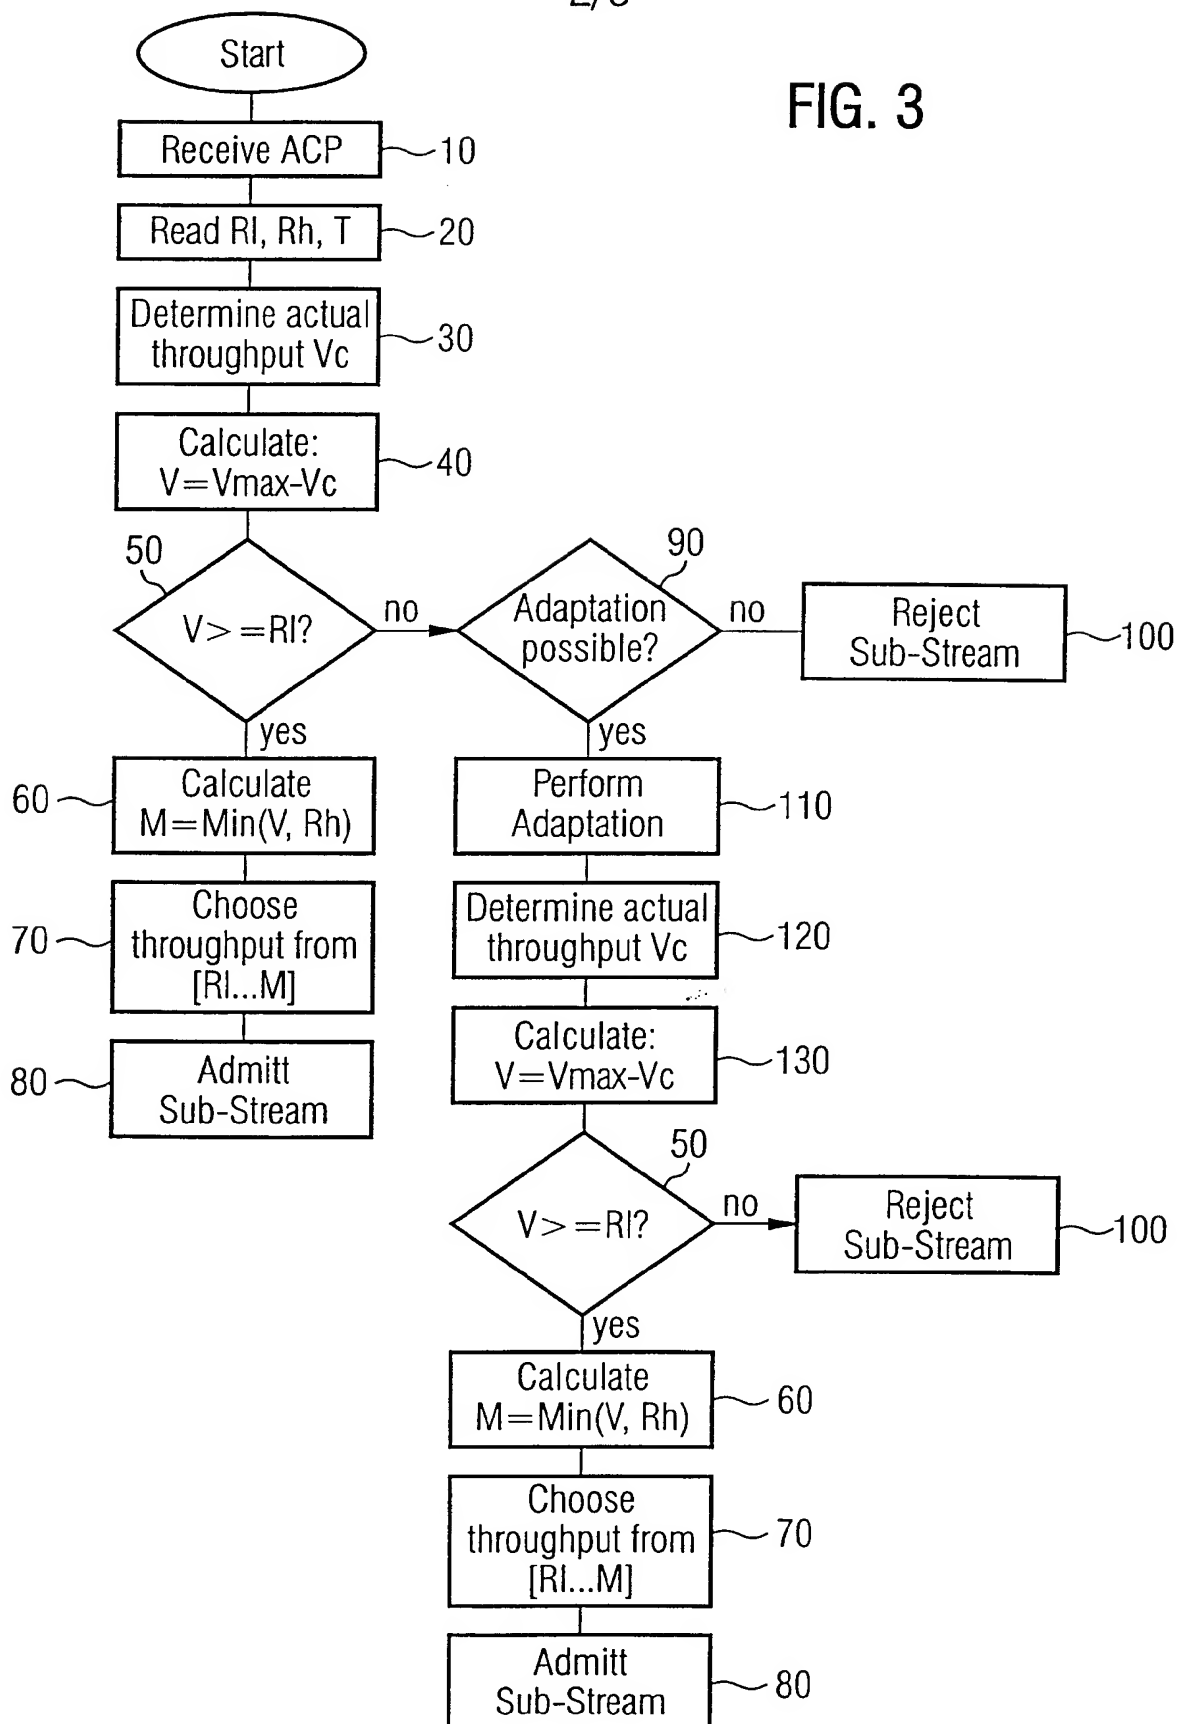


FIG. 4


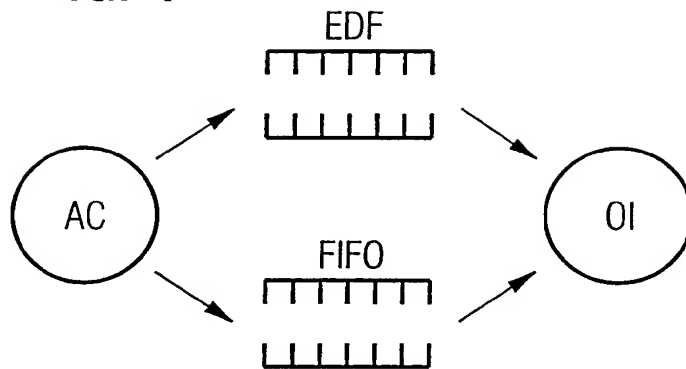


FIG. 5

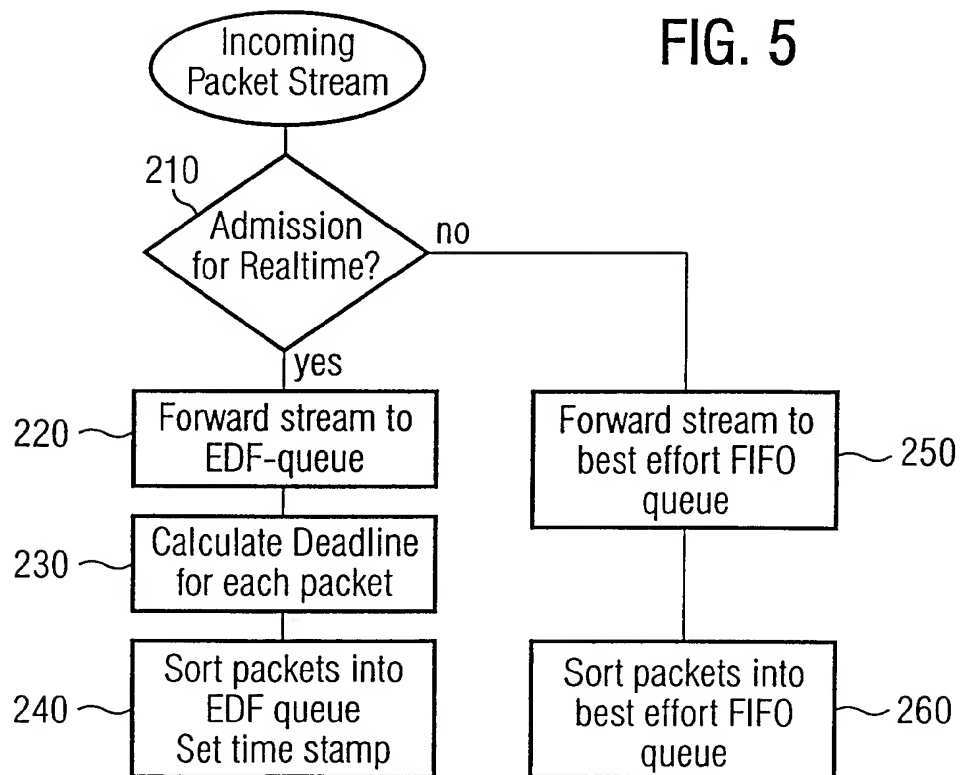

# INTERNATIONAL SEARCH REPORT

Int: lonal Application No

PCT/EP 00/06526

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L12/56 H04L12/64

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

INSPEC, EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>LIEBEHERR J ET AL: "Workconserving vs. non-workconserving packet scheduling: an issue revisited"</p> <p>1999 SEVENTH INTERNATIONAL WORKSHOP ON QUALITY OF SERVICE. IWQOS'99. (CAT. NO.98EX354), PROCEEDINGS OF IWQOS'99 - SEVENTH INTERNATIONAL WORKSHOP ON QUALITY OF SERVICE, LONDON, UK, 31 MAY-4 JUNE 1999,</p> <p>pages 248-256, XP002130270</p> <p>1999, Piscataway, NJ, USA, IEEE, USA</p> <p>ISBN: 0-7803-5671-3</p> <p>page 252, column 1, line 1 - line 37</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p>	1,15,21



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 October 2000

Date of mailing of the international search report

16/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lamadie, S

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/06526

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	HIMONAS S D ET AL: "PERFORMANCE EVALUATION OF A REAL-TIME TRANSPORT PROTOCOL WITH DETERMINISTIC AND STATISTICAL QOS GUARANTEES" IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS (ICC), US, NEW YORK, NY: IEEE, 1997, pages 256-260, XP000740241 ISBN: 0-7803-3926-6 page 257, column 1, paragraph 3.1 page 258, column 1, line 54 - line 58 ----	1,21
A	WEST R ET AL: "Dynamic window-constrained scheduling for multimedia applications" PROCEEDINGS IEEE INTERNATIONAL CONFERENCE ON MULTIMEDIA COMPUTING AND SYSTEMS, PROCEEDINGS OF ICMCS99: IEEE MULTIMEDIA SYSTEMS '99: INTERNATIONAL CONFERENCE ON MULTIMEDIA COMPUTING AND SYSTEMS, FLORENCE, ITALY, 7-11 JUNE 1999, pages 87-91 vol.2, XP002130271 1999, Los Alamitos, CA, USA, IEEE Comput. Soc, USA ISBN: 0-7695-0253-9 page 87, paragraph 1 page 88, column 1, line 28 -column 2, line 47 ----	15
A	WIDJAJA I ET AL: "A CALL ADMISSION CONTROL FOR MULTISERVICE NETWORKS WITH DECLARABLE AND ENFORCEABLE TRAFFIC PARAMETERS" TELETRAFFIC SCIENCE AND ENGINEERING, NL, AMSTERDAM, ELSEVIER, vol. 1A, 6 June 1994 (1994-06-06), pages 213-222, XP000593412 ISBN: 0-444-82031-0 abstract page 215, paragraph 2.2 ----	23
A	EP 0 814 632 A (NIPPON TELEGRAPH & TELEPHONE) 29 December 1997 (1997-12-29) page 2, line 15 - line 35 page 6, line 15 - line 56 figures 2,3 -----	23

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/06526

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0814632 A	29-12-1997	JP 10013416 A	16-01-1998
		CA 2208096 A	18-12-1997